



C313 Series Indoor Monitor User Manual

About This Manual

Thank you for choosing Akuvox's C313 series indoor monitor. This manual is intended for end users, who need to use and configure the indoor monitor. This manual provides an introduction of basic functions and features of the product. It is suitable for 113.31.4.1xx version. Please visit Akuvox forum or consult technical support for any new information or latest firmware.

Note: Please refer to universal abbreviation form in the end of manual when meet any abbreviation letter.

Content

1. Product Overview	1
1.1. Product Description.....	1
1.2. Connector Introduction.....	2
2. Daily Use	3
2.1. Starting.....	3
2.2. Making a Call.....	5
2.2.1. Calling from Call List.....	5
2.2.2. Calling from All Call.....	5
2.2.3. Calling from Missed Call.....	6
2.2.4. Calling from Device.....	7
2.2.5. Calling from Local Contacts.....	7
2.2.6. Calling from Keypad.....	8
2.3. Receiving a Call.....	8
2.3.1. Receive an Incoming Call.....	8
2.3.2. During the Session.....	9
2.4. Monitor.....	9

2.4.1. Checking the Monitor.....	10
2.5. Message.....	10
2.5.1. Text Message.....	11
2.5.1.1. Creating a Text Message.....	12
2.5.1.2. Deleting a Text Message.....	13
2.5.2. Audio Message.....	13
2.5.2.1. Creating an Audio Message.....	15
2.5.2.2. Deleting an Audio Message.....	16
2.6. Arming.....	17
2.6.1. Arming Mode.....	17
2.6.2. Disarm Password.....	18
2.6.3. Alarm Log.....	19
2.6.4. Status.....	20


1. Product Overview

1.1. Product Description

C313X is a Linux SIP-based with smooth touch-screen indoor monitor. It can be connected with Akuvox door phone for audio/video communication, unlocking and monitoring.

Residents can communicate with visitors via audio/video call, and it supports to unlock the door remotely. It is more convenient and safer for residents to check the visitor's identity through its video preview function.

C313X are often applied to scenarios such as villas, apartments and buildings.

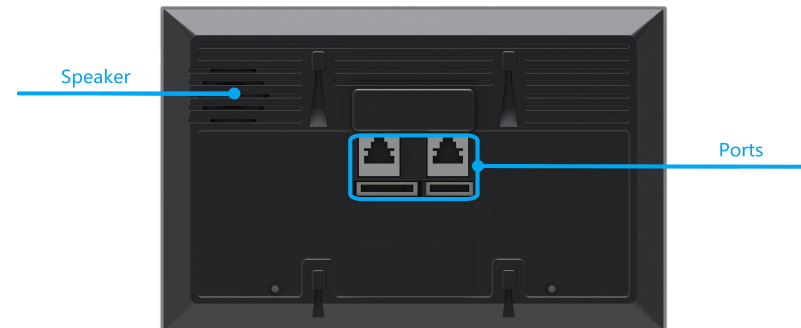

1.2. Connector Introduction

POE: POE connector which it can provide both power and network connection.

RJ45 (PON): Share the network access from POE port, and for PC and other equipments connection.

12V/GND: External power supply terminal if POE is not available.

RS485+/-: RS485 terminal.

Bell/GND: Connect a simple two-wire door bell.

Relay (NO/COM/NC): Relay control terminal.

IO1- IO8/GND: Connect with different alarm detectors for 8 security zones.

Note: The general indoor monitor interface diagram is only for reference.

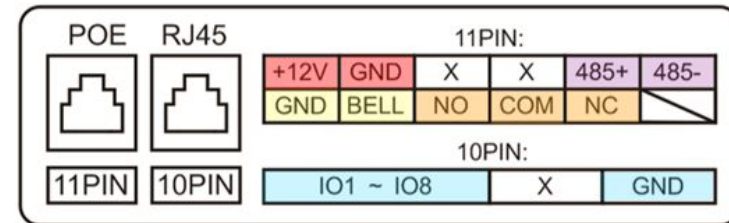


Figure 1.2-1 C313X interface

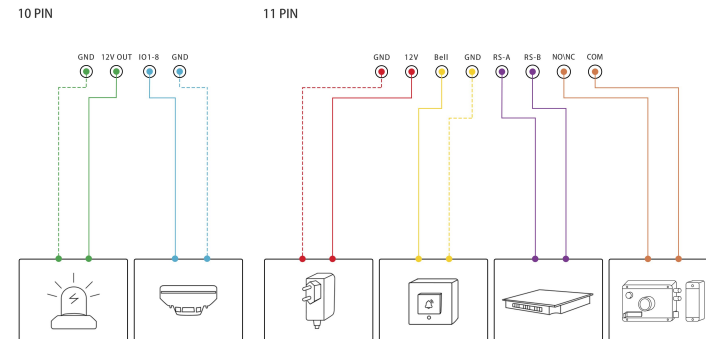


Figure 1.2-2 General interface

2. Daily Use

2.1. Starting

When booting C313X first time, users need to choose a suitable way to connect to network, wireless or wire.

To choose a proper device mode according to specific application scenarios. C313X supports 3 modes, including **Cloud**, **Discovery** and **SDMC**. It only pop up “Cloud” mode and discovery mode for users choosing. Tap **Skip** if users are adopting SDMC mode. Discovery mode is default mode if users don't choose any device mode.

Discovery mode: It is a plug and play configuration mode. Akuvox devices will configure themselves automatically when users power on the devices and connect them to network. It is super time-saving mode and it will greatly bring users convenience by reducing

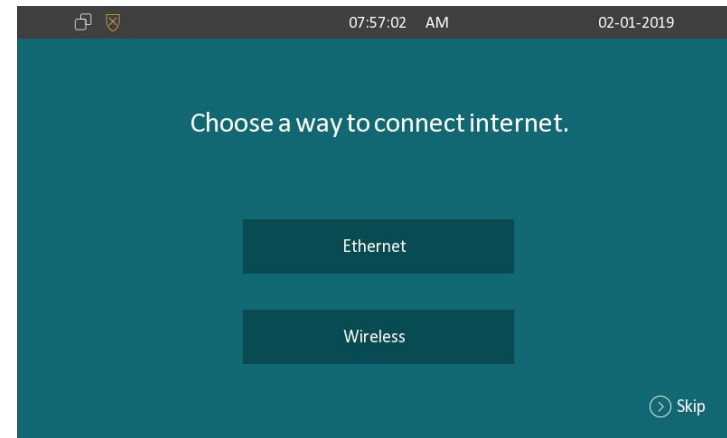


Figure 2.1-1 Network selection

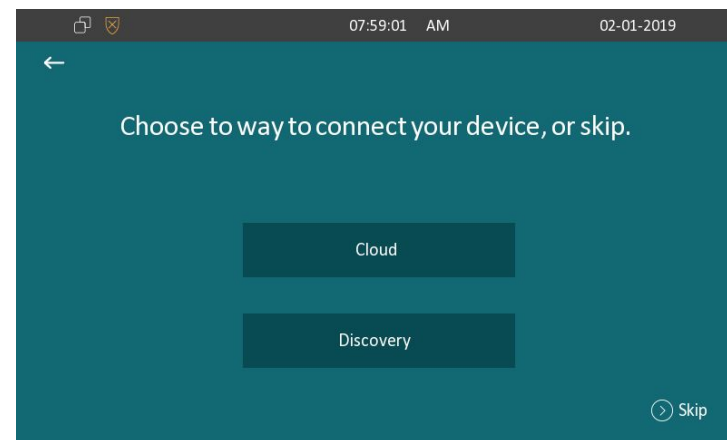


Figure 2.1-2 Device mode selection

manual operations. This mode do not need to be done any configurations previously by the administrator.

Cloud mode: Akuvox Cloud is an all in one management system. Akuvox Cloud is the mobile service that allows audio, video, remote access control between smart phones and Akuvox intercoms. All configurations in the device will be issued automatically from cloud. If users decide to use Akuvox cloud, please contact administrator, who will help to configure related settings before using.

SDMC mode: SDMC is a center management software which is suitable for managing a community in LAN. The device will get settings from SDMC automatically.

2.2. Making a Call

There are 6 ways to establish VOIP calls by C313X.

2.2.1. Calling from Call List

In the home page, choose a number from **Call List** to make a call.

- Scroll up or down the **Call List** to choose the contact that users want to call.

Note: In Cloud or SDMC mode, the **Call List** of C313X will be issued from the system.

2.2.2. Calling from All Call

In the home page, it could call multiple indoor monitors if they are set under the same multicast address. During the session, C313X is listened by other indoor monitors.

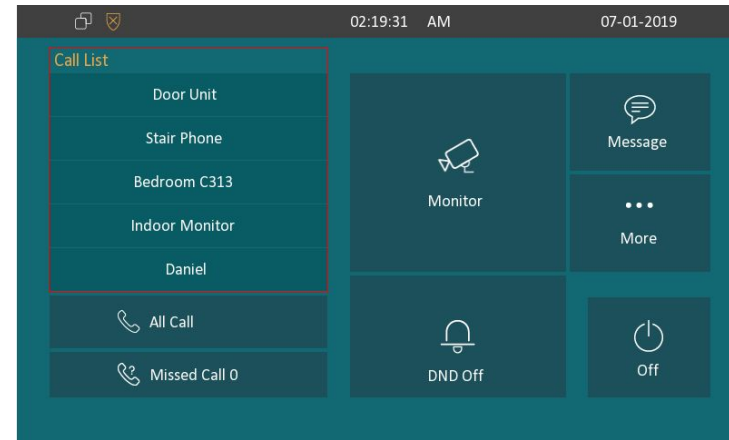


Figure 2.2.1 Call from call list

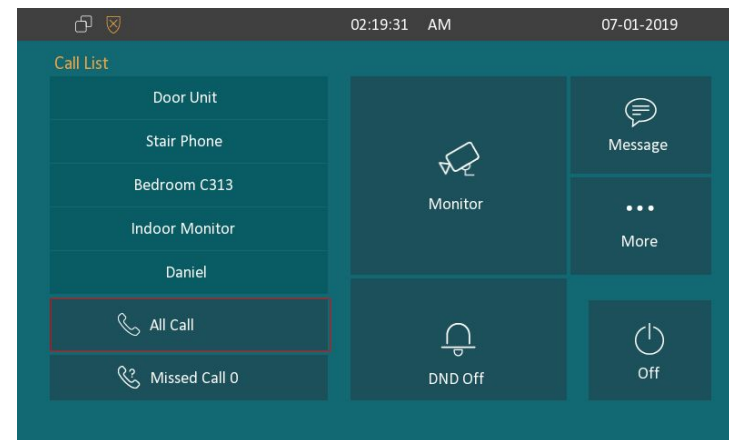


Figure 2.2.2 Call from all call

- Tap **All Call** icon to call other indoor monitors which are set in the same multicast group.

2.2.3. Calling from Missed Call

In the home page, missed call indicates how many calls that users missed (1 missed call for an example). Missed call could be treated as a brief call log.

- Tap **Missed Call** icon ① to view the calls that were not answered before.
- Choose the contact on the call list ② which users want to call out.
- Choose **Audio** ③ or **Video** ④ mode to call out.

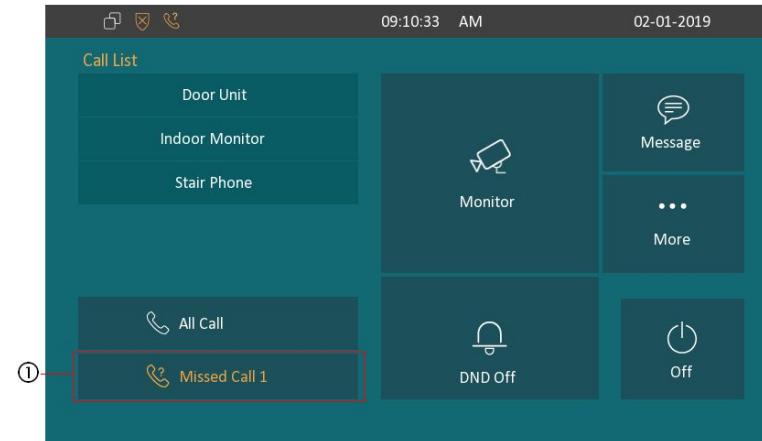


Figure 2.2.3-1 Call from missed call

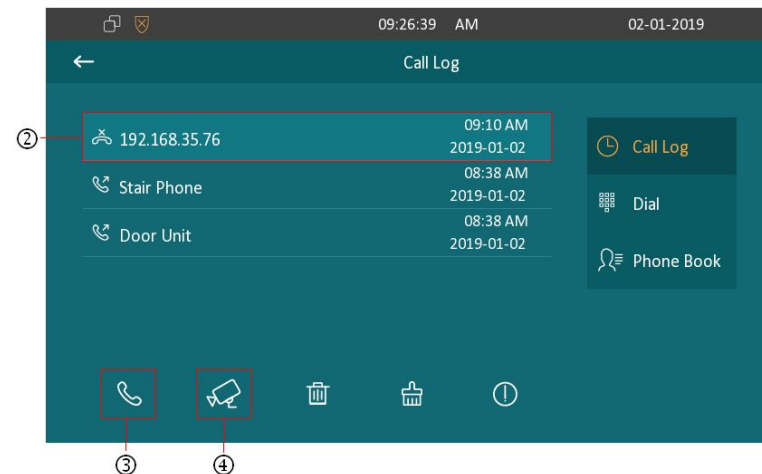


Figure 2.2.3-2 Call from missed call

2.2.4. Calling from Device

It will display the devices connected with C313X on the contact interface. On the device, go to **More - Contact - Device**.

- Click **Update** ① to synchronous the contact automatically.
- Choose a device ② which users want to call.
- Choose **Audio** ③ or **Video** ④ mode to call out.

Note: Only under Discovery mode, users need to press **Update** key manually.

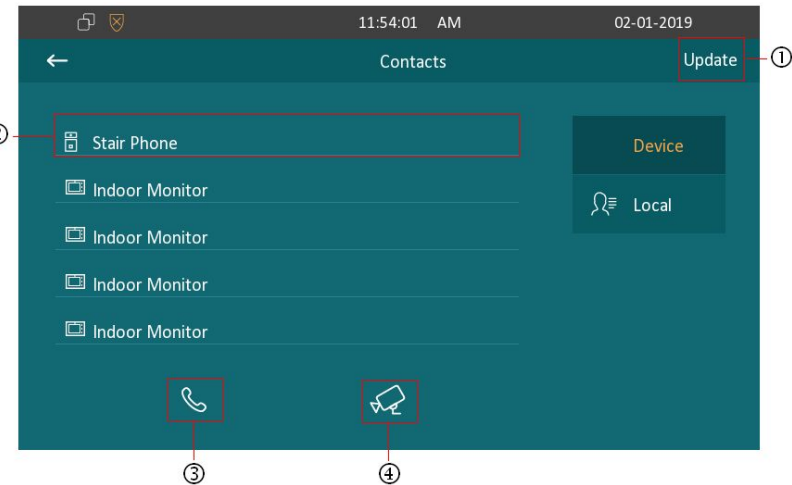


Figure 2.2.4 Call from device

2.2.5. Calling from Local Contacts

On the device, go to **More - Contact** to enter the **Local Contacts** interface to make a call.

- C313X supports fuzzy matching query ①. To search the list by entering number or alphabet.
- Scroll up or down to select contact ② that users want to call.

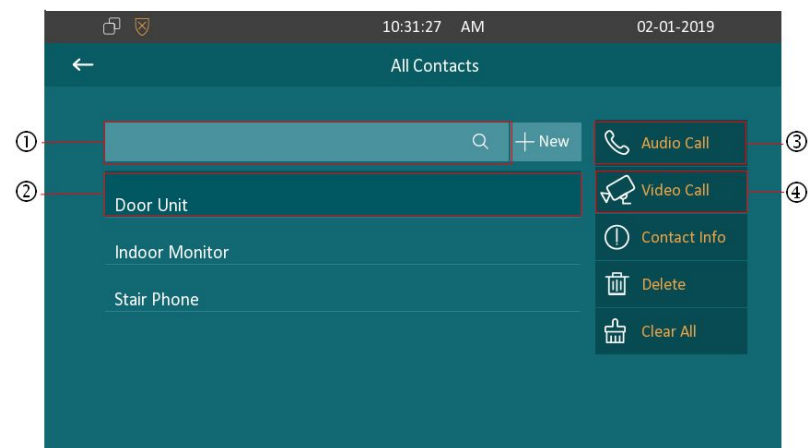


Figure 2.2.5 Call from local contacts

- Choose **Audio Call** ③ or **Video Call** ④ mode to call out.

2.2.6. Calling from Keypad

On the device, go to **More - Call - Dial** ① to get access to keypad.

- Click account icon ② above the keypad to switch accounts to make a call.
- Input the SIP account /IP address to the keypad ③ to call the corresponding devices or soft phone.
- Choose **Audio** ④ or **Video** ⑤ mode to call out.

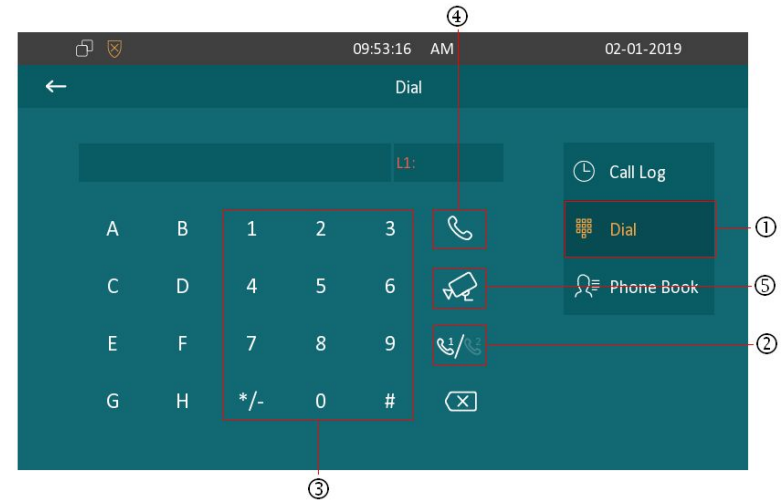


Figure 2.2.6 Call from keypad

2.3. Receiving a Call

2.3.1. Receive an Incoming Call

C313X supports to preview the caller when it receives an incoming call from door phone.

- Tap **Answer** to pick up the incoming call.

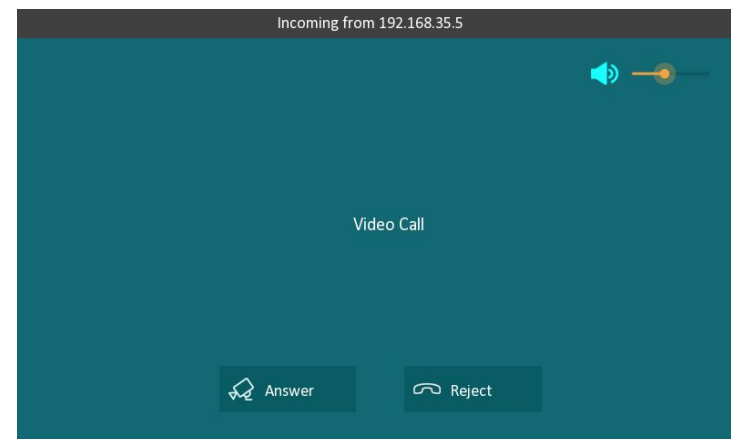


Figure 2.3.1 Incoming call

- Tap **Reject** to reject the incoming call. Swipe the volume line on the right side to adjust the ring tone volume.

2.3.2. During the Session

- Tap **Capture** to take a screen shot of current interface.
- Tap **Unlock** to open the corresponding door (if the call is from outdoor unit).
- Tap **Cancel** to hang up the current call.
- Tap **New** to hold the current call and make a new call.
- Tap **Hold** to hold the current call. The call can be resumed or canceled later.
- Tap **Mute** to eliminate the voice on C313X's side.

2.4. Monitor

Monitor feature enables users to view the real-time video from IP cameras or door phones anytime. Click **Monitor** in the home page.

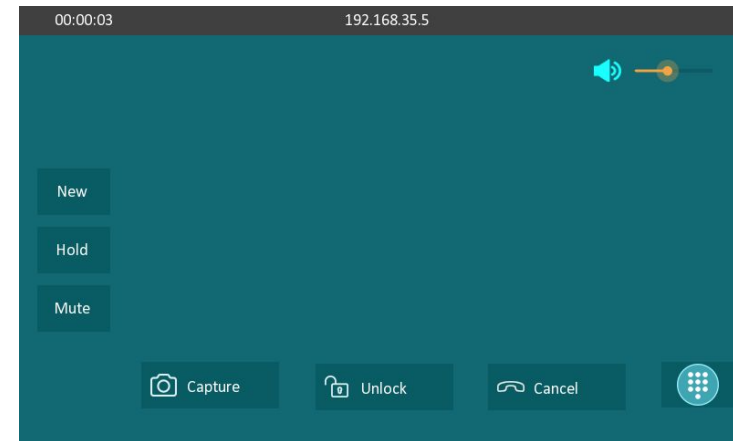


Figure 2.3.2 During the session

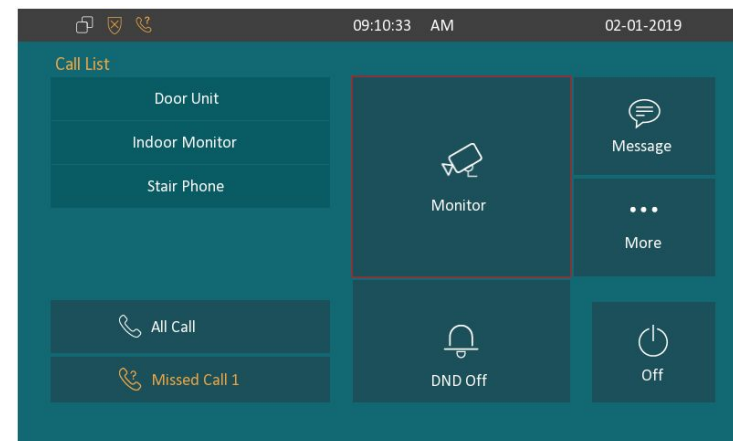


Figure 2.4 Monitor

2.4.1. Checking the Monitor

Choose the outdoor devices from the list. The real-time video from the door phone or IP camera will show in the screen .

- Press **Capture** to take a screen shot of current interface.
- Press **Cancel** to exit the monitoring.

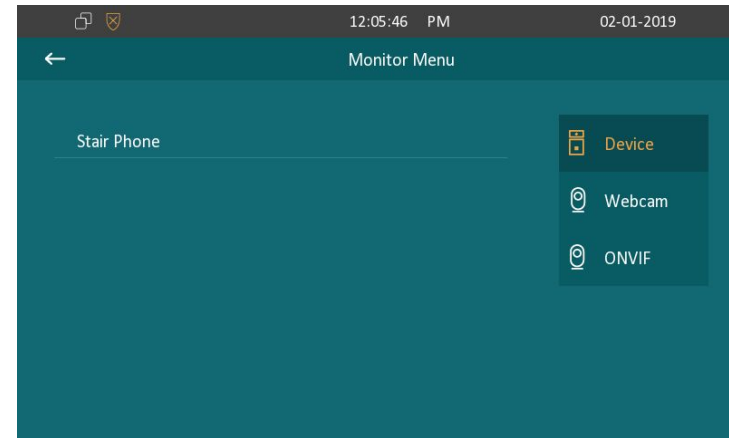


Figure 2.4.1-1 Live view list

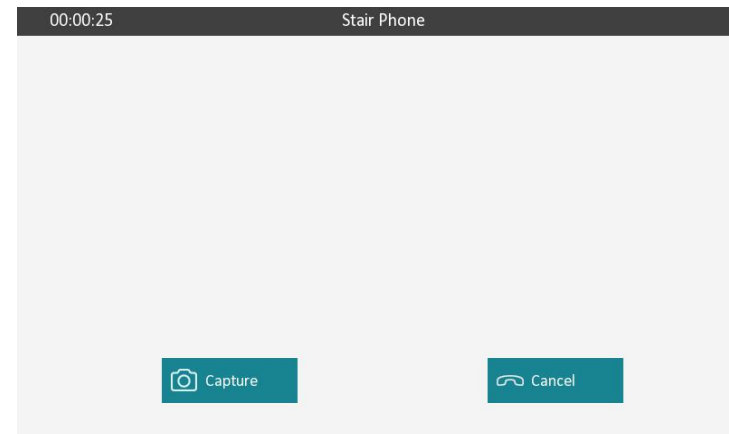


Figure 2.4.1-2 Live view video

2.5. Message

Message ① indicates how many messages are unread (Two unread messages for an example). Or directly enter the message interface to manage.

2.5.1. Text Message

- Tap **Message** ① on the main interface to view the unread messages.
- Tap the unread messages ② to view the text message in details.

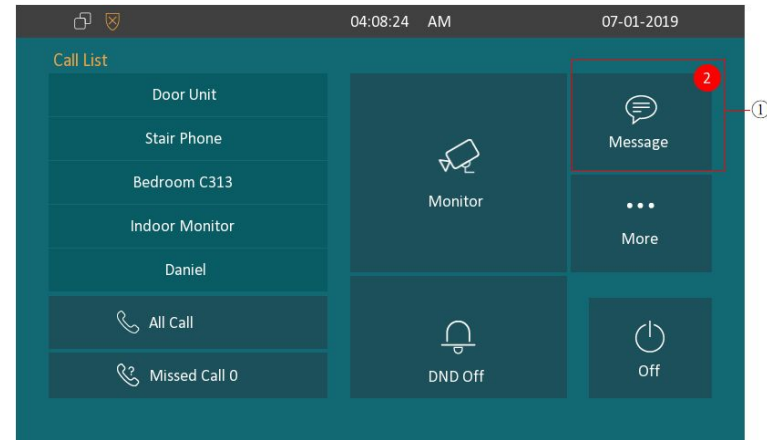


Figure 2.5 Message

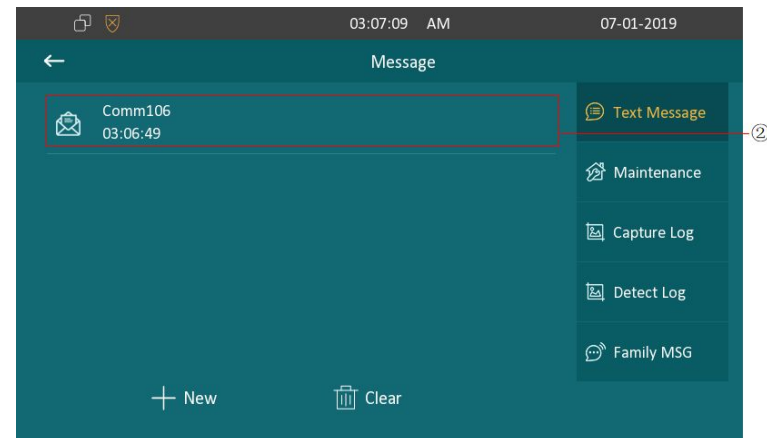


Figure 2.5.1-1 Text message

2.5.1.1. Creating a Text Message

- Press **New** key ① to create a new text message.
- Enter the destination number manually ② or select the device quickly from the below list ③ .
- Input the message content which users want to send ④.
- Press **Send** key ⑤ to send.

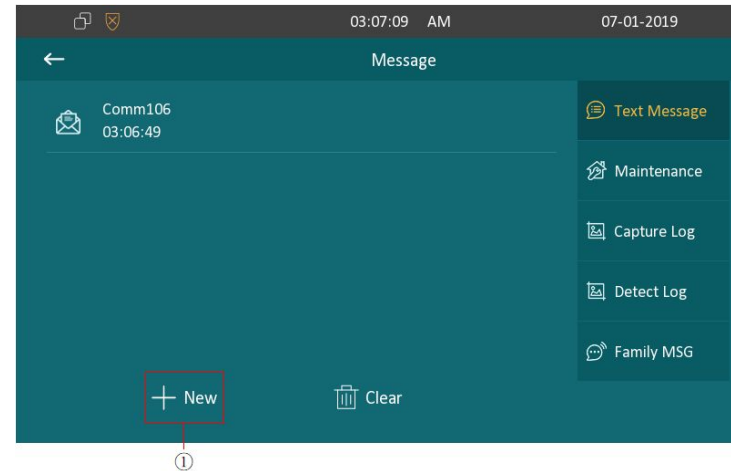


Figure 2.5.1.1-1 Create a text message

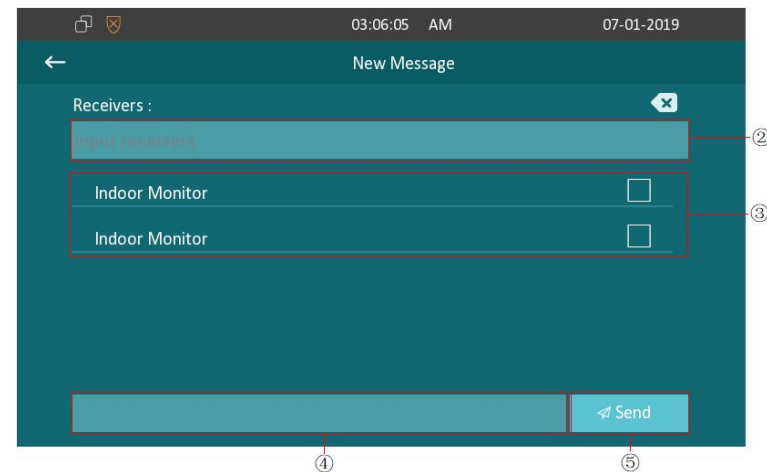


Figure 2.5.1.1-2 Create a text message

2.5.1.2. Deleting a Text Message

- Press **Clear** ① and select text message ② first.
- Click **Select All** ③ to select all message in the message lists.
- Click **Delete** ④ to delete the messages have been selected.
- Click **Cancel** ⑤ to cancel the operation.
- Click **Back** icon ⑥ to exit the message interface.

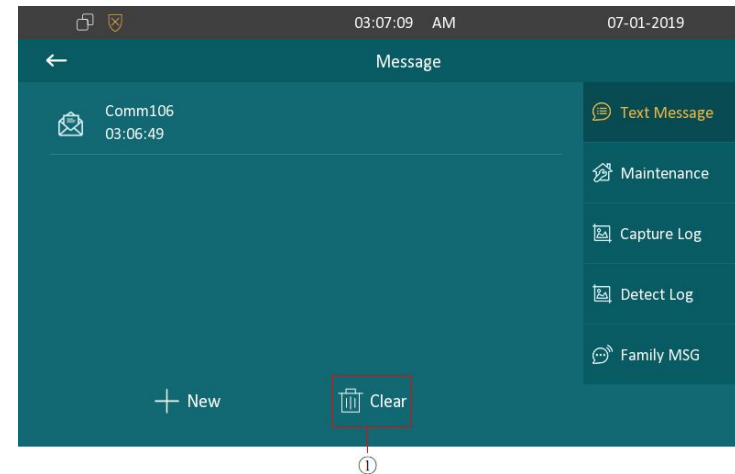


Figure 2.5.1.2-1 Delete a text message

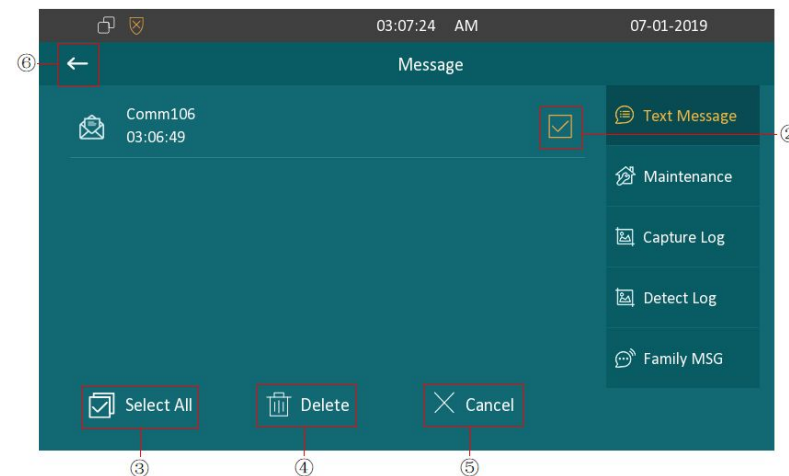


Figure 2.5.1.2-2 Delete a text message

2.5.2. Audio Message

- Tap the **Family MSG** ① to view the audio messages from family members who record in C313X directly in details.

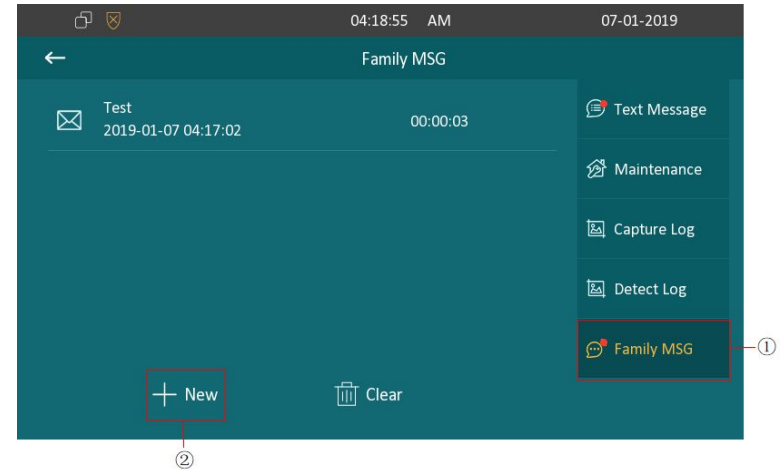


Figure 2.5.2 Audio Message

2.5.2.1. Creating an Audio Message

- Press **New** key ② to create a new audio message.
- Press **Record** key ③ which family members want to remind users.
- Press **Test** key ④ to check the audio message is complete, and **Volume** key ⑤ can adjust the audio volume.
- Press **Save** key ⑥ to add the audio message.
- Press **Delete** key ⑦ to cancel the operation.

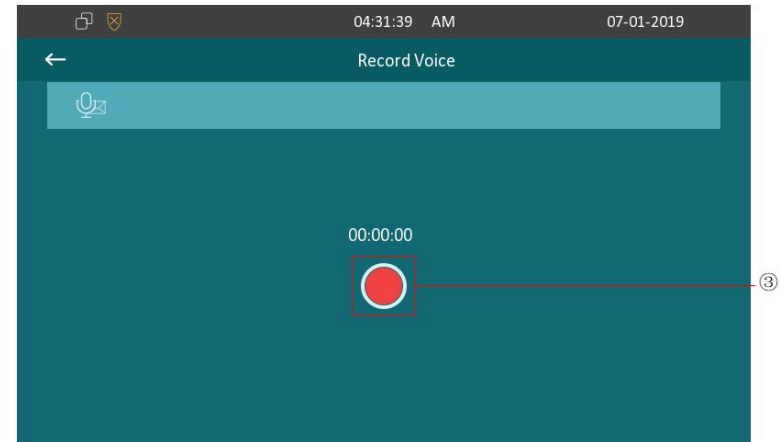


Figure 2.5.2.1-1 Create audio message

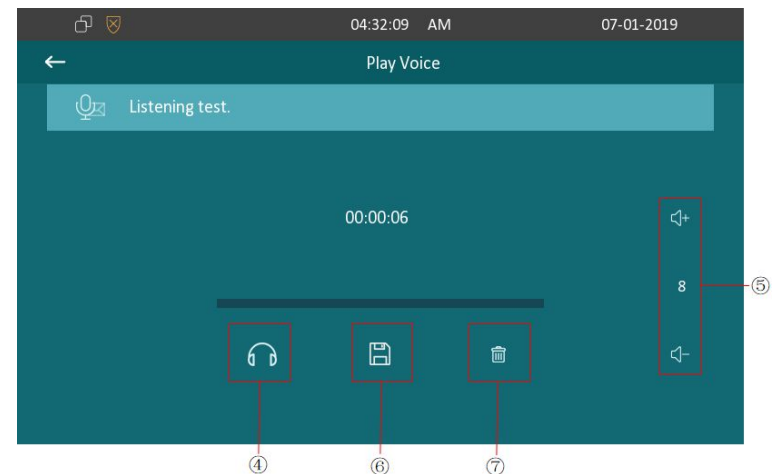


Figure 2.5.2.1-2 Create an audio message

2.5.2.2. Deleting an Audio Message

- Press **Clear** ① and select audio message ② first.
- Click **Select All** ③ to select all message in the message lists.
- Click **Delete** ④ to delete the messages have been selected.
- Click **Cancel** ⑤ to cancel the operation.

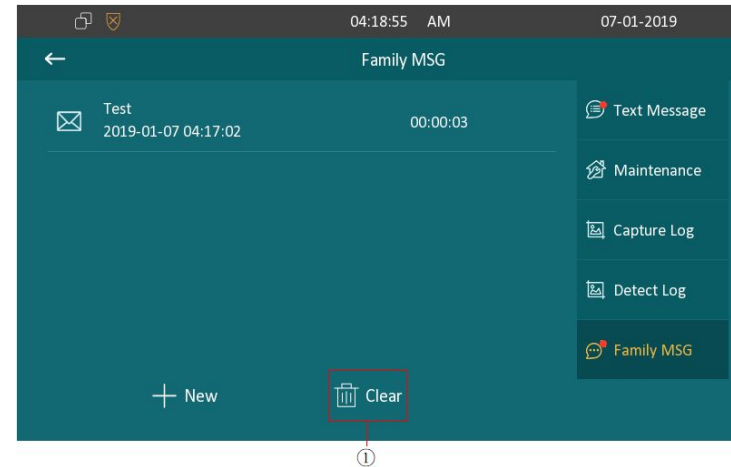


Figure 2.5.2.2-1 Delete an audio message

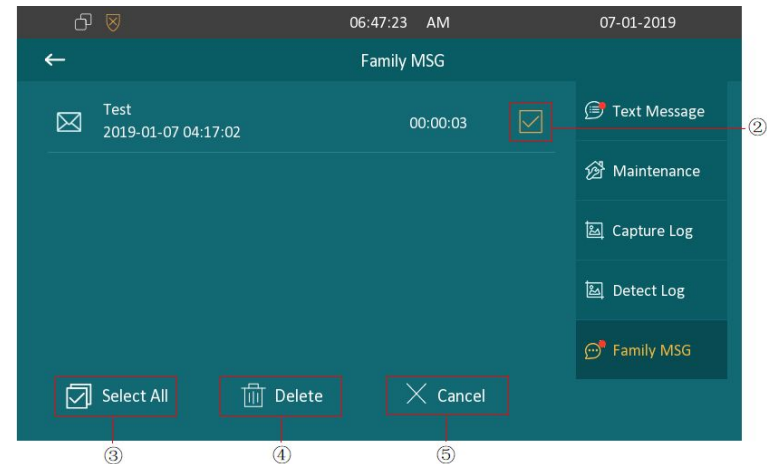


Figure 2.5.2.2-2 Delete an audio message

2.6. Arming

Tap **Arming** to enter the “Arming” interface. Arming feature is not displayed by default. Users could choose to display “Arming” on the home /more page, please refer to chapter 3.4.12 about the feature display setting.

C313X supports 4 modes, including **Home** mode, **Night** mode, **Away** mode and **Disarmed** mode.

2.6.1. Arming Mode

On the device, go to **Arming - Arming Mode**. Users can see all of the 8 zones and corresponding sensor types. Slide down to check more information in this interface.

- Adjust **Defence delay time**. It means when users change the arming mode from other modes, there will be 90 seconds delay time to get activated.

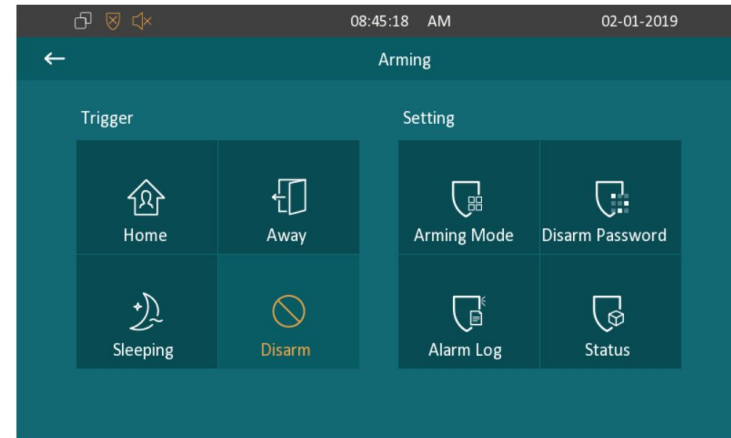


Figure 2.6 Arming

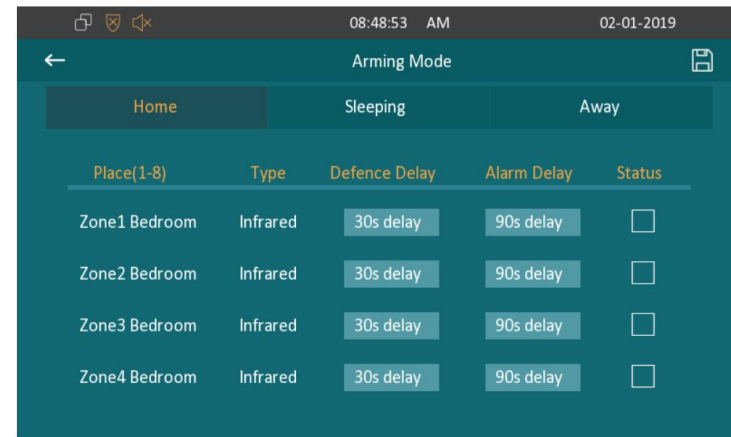


Figure 2.6.1-1 Arming mode

- To setup the **Alarm delay**. It means when the sensor triggered, there will be 90 seconds delay time to announce the notification.
- The **Status** in the corresponding zone means whether the zone is available or not.
- Press **Save** in the top right corner to save the modification.

On the web portal, users can go to **Arming - Arming Mode** to configure.

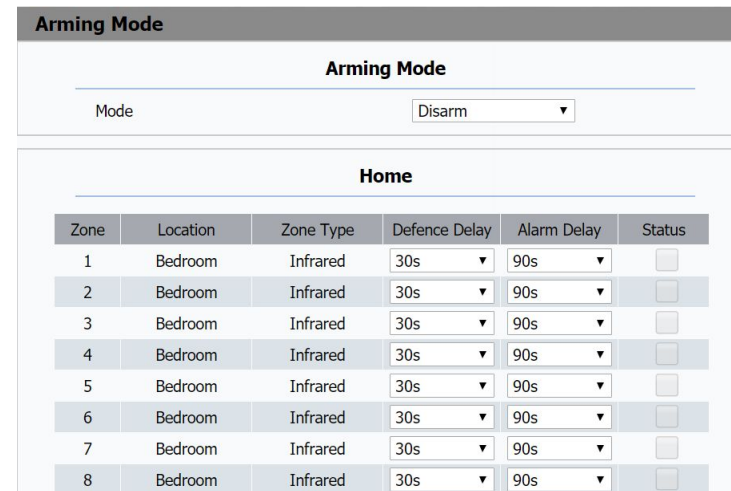


Figure 2.6.1-2 Arming mode

2.6.2. Disarm Password

On the device, go to **Arming - Disarm Password** to enter the disarm password settings interface. Users can modify the disarm password here.

- Enter the **original password** first, and it is 0000 by default.
- Enter the **new password**.

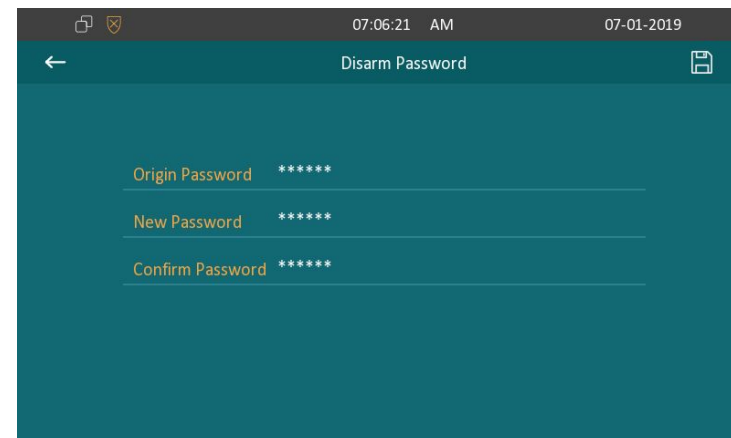



Figure 2.6.2-1 Disarm password

- Enter the **confirm password** for confirming.
- Press **Save** key to save the modification.

On the web portal, users can go to **Arming - Disarm Code** to configure.



Disarm Code

Current Password	<input type="text"/>
New Password	<input type="text" value="length must be 1-10"/>
Confirm Password	<input type="text" value="match with new pwd"/>

Figure 2.6.2-2 Disarm password

2.6.3. Alarm Log

On the device, go to **Arming - Alarm Log** to enter the alarm log interface. Users can check the alarm log, including “location,” “zone,” “zone type” and “time.”

- Select an **alarm log** ① first.
- Press this icon ② to delete the selected alarm log.
- Press this icon ③ to delete all alarm log.

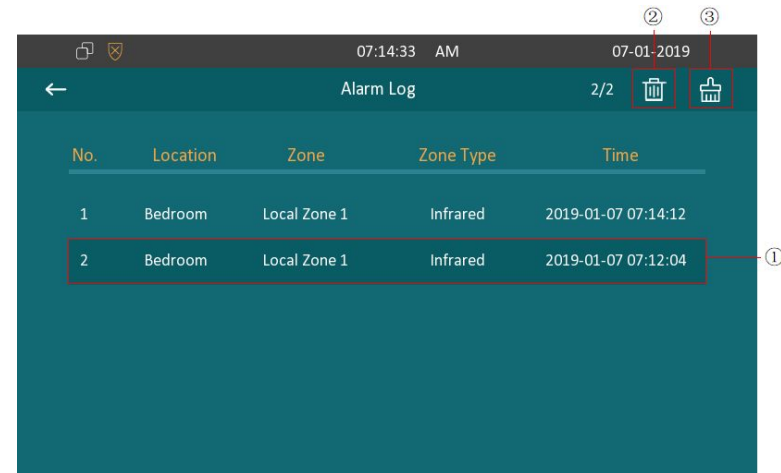



Figure 2.6.3 Alarm log

2.6.4. Status

On the device, go to **Arming - Status** to enter the zone status interface. Users can check the status of zones, including “location,” “zone type,” “trigger mode” and “status.”



Zone	Location	Zone Type	Trigger	Status
Zone1	Guest room	Doorbell	NO	24H
Zone2	Bedroom	Infrared	NC	Disable
Zone3	Bedroom	Infrared	NC	Disable
Zone4	Bedroom	Infrared	NC	Disable
Zone5	Bedroom	Infrared	NC	Disable
Zone6	Bedroom	Infrared	NC	Disable
Zone7	Bedroom	Infrared	NC	Disable
Zone8	Bedroom	Infrared	NC	Disable

Figure 2.6.4 Zone status

Abbreviations

ACS: Auto Configuration Server

Auto: Automatically

AEC: Configurable Acoustic and Line Echo Cancelers

ACD: Automatic Call Distribution

Autop: Automatical Provisioning

AES: Advanced Encryption Standard

BLF: Busy Lamp Field

COM: Common

CPE: Customer Premise Equipment

CWMP: CPE WAN Management Protocol

DTMF: Dual Tone Multi-Frequency

DHCP: Dynamic Host Configuration Protocol

DNS: Domain Name System

DND: Do Not Disturb

DNS-SRV: Service record in the Domain Name System

FTP: File Transfer Protocol

GND: Ground

HTTP: Hypertext Transfer Protocol

HTTPS: Hypertext Transfer Protocol Secure

IP: Internet Protocol

ID: Identification

IR: Infrared

LCD: Liquid Crystal Display

LED: Light Emitting Diode

MAX: Maximum

POE: Power Over Ethernet

PCMA: Pulse Code Modulation A-Law

PCMU: Pulse Code Modulation μ -Law

PCAP: Packet Capture

PNP: Plug and Play

RFID: Radio Frequency Identification

RTP: Real-time Transport Protocol

RTSP: Real Time Streaming Protocol

MPEG: Moving Picture Experts Group

MWI: Message Waiting Indicator

NO: Normal Opened

NC: Normal Connected

NTP: Network Time Protocol

NAT: Network Address Translation

NVR: Network Video Recorder

ONVIF: Open Network Video Interface Forum

SIP: Session Initiation Protocol

SNMP: Simple Network Management Protocol

STUN: Session Traversal Utilities for NAT

SMTP: Simple Mail Transfer Protocol

SDMC: SIP Devices Management Center

TR069: Technical Report069

TCP: Transmission Control Protocol

TLS: Transport Layer Security

TFTP: Trivial File Transfer Protocol

UDP: User Datagram Protocol

URL: Uniform Resource Locator

VLAN: Virtual Local Area Network

WG: Wiegand

Contact us

For more information about the product, please visit us at www.akuvox.com or feel free to contact us by

Sales email: sales@akuvox.com

Technical support email: techsupport@akuvox.com

Telephone: +86-592-2133061 ext.7694/8162

We highly appreciate your feedback about our products.

